


Spirálový kabel SPK




Vyrobeno v průmyslové kvalitě, testováno a garantováno 100.000 cyklů pro použití v těžkých provozních podmínkách. Výborná tvarová paměť a vysoká schopnost roztažení (faktor 4).

Díky speciálnímu materiálu izolace jsou spirálové kabely odolné proti mikrobům, hydrolyze a téměř všem minerálním olejům. Jsou UV-stabilní a bez halogenů. PUR/PUR černá, barvy jader dle DIN 47100 hnědá, bílá, zelená, žlutá a černá. Volitelná délka konců (viz tabulka) z nichž je 40 mm bez izolace s dutinkami pro snadnější zapojení. Kroucený kabel lze také zhotovit zakázkově.

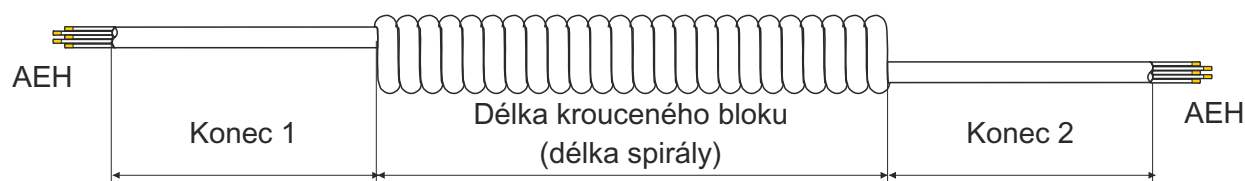

Označení	Délka krouceného bloku (délka spirály)	délka prodloužení (Spirála délka)	Konec 1 (AE1)	Konec 2 (AE2)	Objednací číslo
3-pólový					
SPK 3x0,5mm ²	750	3000	200	200	314769
SPK 3x0,5mm ²	900	3600	200	200	314780
SPK 3x0,5mm ²	900	3600	4000	350	314927
SPK 3x0,5mm ²	750	3000	500	200	314931
SPK 3x0,5mm ²	600	2400	500	200	314921
SPK 3x0,5mm ²	950	3800	500	200	314924
4-pólový					
SPK 4x0,25mm ²	750	3000	200	200	314851
SPK 4x0,25mm ²	900	3600	1000	400	314772
SPK 4x0,25mm ²	1200	4800	4000	400	314774
SPK 4x0,25mm ²	900	3600	2000	350	314455
5-pólový					
SPK 5x0,25mm ²	500	2000	1000	200	314767
SPK 5x0,25mm ²	750	3000	200	200	314721
SPK 5x0,25mm ²	800	3200	1500	200	314765
SPK 5x0,25mm ²	900	3600	200	300	314745
SPK 5x0,25mm ²	900	3600	2000	350	314923
SPK 5x0,25mm ²	1000	4000	1000	1500	314874

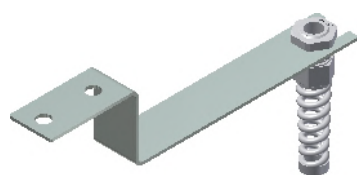


Z Držák pro spirálový kabel vč Spirála žláza M16 (zejména pro sekční)

Model

Obj. č.

HW-SPK-SV16

315097

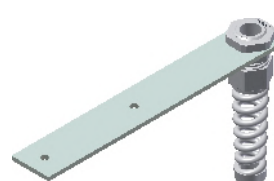

rovný držák pro spirálový kabel, 160x25mm, včetně Spirála žláza M16 (zejména pro rolovací vrata)

Model

Obj. č.

HW-SPK-160/25-SV16

315098

SPK spiral cable




Produced in high industrie quality, tested and guaranteed for 100.000 cycles in use under very harsh conditions. Achievement of high reset force and extension length.

Excerpt factor: 4


Due to the specially designed mixture of the casing the spiral cable is resistant against: microbes, hydrolysis and almost every mineral oil. Further more the spiral cable is UV-resistant and free of halogen.

Material PUR/PUR black, core colors according to DIN 47100: brown, white, green, yellow and black

Variable wire ends (see table), 40mm on both ends without sheathing and with core end sleeve (CES)

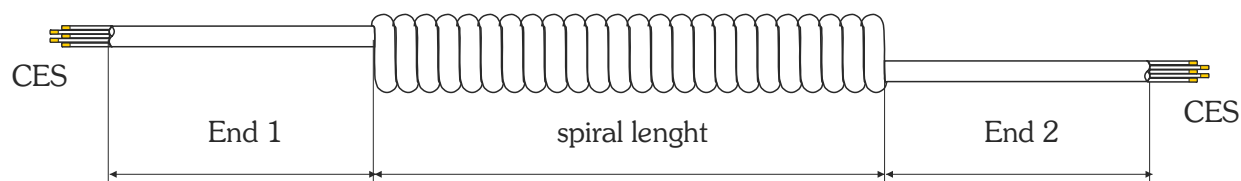

name	spiral length	extended lenght	end 1 (AE1)	end 2 (AE2)	order-no.
3-core					
SPK 3x0,5mm ²	750	3000	200	200	314769
SPK 3x0,5mm ²	900	3600	200	200	314780
SPK 3x0,5mm ²	900	3600	4000	350	314927
SPK 3x0,5mm ²	750	3000	500	200	314931
SPK 3x0,5mm ²	600	2400	500	200	314921
SPK 3x0,5mm ²	950	3800	500	200	314924
4-core					
SPK 4x0,25mm ²	750	3000	200	200	314851
SPK 4x0,25mm ²	900	3600	1000	400	314772
SPK 4x0,25mm ²	1200	4800	4000	400	314774
SPK 4x0,25mm ²	900	3600	2000	350	314455
5-core					
SPK 5x0,25mm ²	500	2000	1000	200	314767
SPK 5x0,25mm ²	750	3000	200	200	314721
SPK 5x0,25mm ²	800	3200	1500	200	314765
SPK 5x0,25mm ²	900	3600	200	300	314745
SPK 5x0,25mm ²	900	3600	2000	350	314923
SPK 5x0,25mm ²	1000	4000	1000	1500	314874

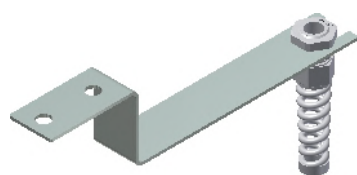


Z-mounting bracket for spiral cable incl. spiral cable gland M16 (for sectional doors)

model

order no.

HW-SPK-SV16

315097



straight mounting bracket for spiral cable, 160x25mm incl. spiral cable gland M16 (roller shutters)

model

order no.

HW-SPK-160/25-SV16

315098